



Disassemble&assemble the battery top case and BMS

Sept.,25


Step 1
Loose the screw;



Step 2: Cut **the silicon bonds between top&bottom case** with ultrasonic cutter;
Open the top case




Step 3 Disassemble the connector inside

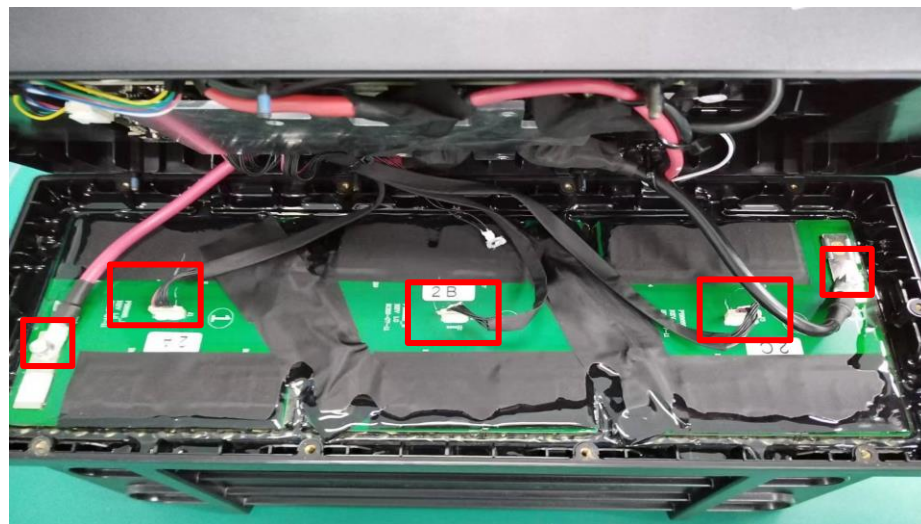

1 - 2 - 3 - 4 - 5

Step 4 Assemble the connector inside with new BMS&Top case

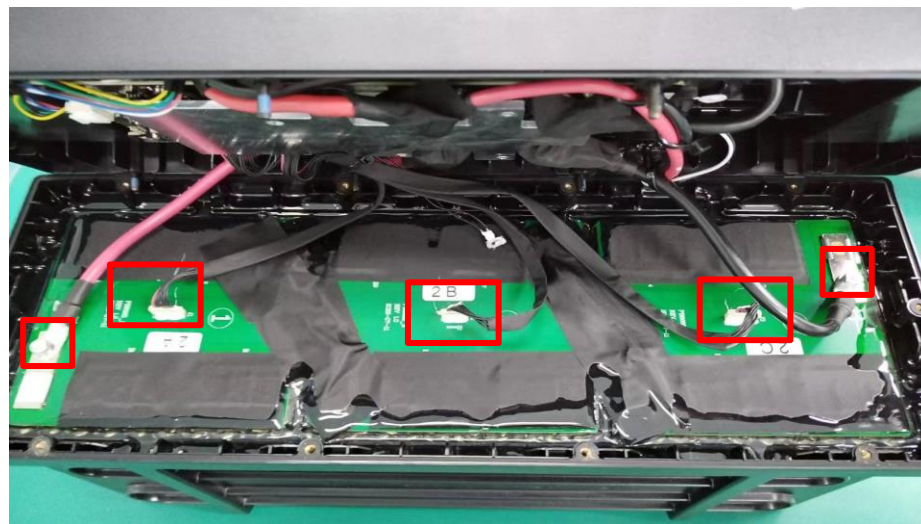

5 - 4 - 3 - 2 - 1

Step 5 Lock the new Top case

