

REPAIR SHEET - REPLACEMENT OF THE FAN UNIT

REASON:

OPERATOR

WORKSHOP

DATE

REGISTRATION

TIME

#iCONECTAR!

COST

REQUIRED TOOLS

SAFETY

☐ 10mm socket	☐	☐	☐ Steel toe-cap shoes
☐ small ratchet wrench	☐	☐	☐ Safety gloves
☐ 4mm Allen wrench	☐	☐	
☐ Flat-head screwdriver	☐	☐	
☐	☐	☐	

TOOLS

PROCESS

ASSEMBLY DRAWING


ESTIMATED TIME

Disassembly of the fan unit.

Small ratchet wrench, 10mm Socket, 4mm Allen wrench, Flathead screwdriver.

1- Using a 4mm Allen key, the small casing, and a 10mm socket, unscrew the nut while holding the screw with the Allen key.


2- Disconnect the fan cable by pressing the connector's locking tab.



5

REMARKS

REAL TIME

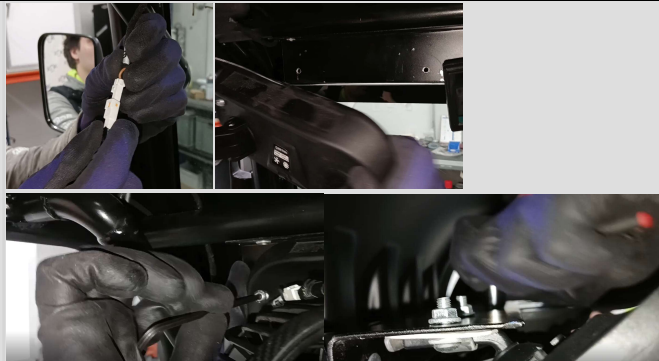TOOLS		PROCESS	ASSEMBLY DRAWING	ESTIMATED TIME
2	Small ratchet wrench, 10mm Socket, 4mm Allen wrench.	Assembly of the fan unit. 1- Connect the fan cable (make sure the locking lever is secured by the connector). 2- Position the fan unit so that the two screws pass through the plastic base and the aluminum bracket on the chassis. 3- Using the small wrench, the 10mm socket, and the 4mm Allen key, screw in and tighten the assembly.		5
	REMARKS			